08-31-00

JC923 U.S. PTO
08/30/00

JC901 U.S. PTO
09/650878
08/30/00

Please type a plus sign (+) inside this box →

PTO/SB/05 (4/98)
Approved for use through 09/30/2000. OMB 0651-0032
Patent and Trademark Office: U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

UTILITY PATENT APPLICATION TRANSMITTAL

(Only for new nonprovisional applications under 37 C.F.R § 1.53(b))

Attorney Docket No.	
First Inventor or Application Identifier	CHRIS S. BRUNT
Title	FOUNTAIN CONTROL FOR GENERATING DYNAMICALLY CHANGING FLOW PATTERNS
Express Mail Label No.	EK 624933272 US

APPLICATION ELEMENTS

See MPEP chapter 600 concerning utility patent application contents

ADDRESS TO: Assistant Commissioner for Patents
Box Patent Application
Washington, DC 20231

1. [+] * Fee Transmittal Form *(e.g., PTO/SB/17)*
(Submit an original and a duplicate for fee processing)

2. [+] Specification [Total Pages 17]
(preferred arrangement set forth below)
- Descriptive title of the Invention
- Cross References to Related Applications
- Statement Regarding Fed sponsored R & D
- Reference to Microfiche Appendix
- Background of the Invention
- Brief Summary of the Invention
- Brief Description of the Drawings *(if filed)*
- Detailed Description
- Claim(s)
- Abstract of the Disclosure

3. [+] Drawing(s) *(35 U.S.C. 113)* [Total Sheets 5]

4. Oath or Declaration [Total Pages 3]
a. [+] Newly executed (original or copy)
b. [ ] Copy from a prior application (37 C.F.R. § 1.63(d))
(for continuation/divisional with Box 16 completed)
i. [ ] DELETION OF INVENTOR(S)
Signed statement attached deleting inventor(s) named in the prior application, see 37 C.F.R. §§ 1.63(d)(2) and 1.33(b).

5. [ ] Microfiche Computer Program *(Appendix)*

6. Nucleotide and/or Amino Acid Sequence Submission
(if applicable, all necessary)
a. [ ] Computer Readable Copy
b. [ ] Paper Copy (identical to computer copy)
c. [ ] Statement verifying identity of above copies

*** NOTE FOR ITEMS 1 & 13: IN ORDER TO BE ENTITLED TO PAY SMALL ENTITY FEES, A SMALL ENTITY STATEMENT IS REQUIRED (37 C.F.R. § 1.27), EXCEPT IF ONE FILED IN A PRIOR APPLICATION IS RELIED UPON (37 C.F.R. § 1.28).**

ACCOMPANYING APPLICATION PARTS

7. [ ] Assignment Papers (cover sheet & document(s))
8. [ ] 37 C.F.R.§3.73(b) Statement *(when there is an assignee)* [ ] Power of Attorney
9. [ ] English Translation Document *(if applicable)*
10. [ ] Information Disclosure Statement (IDS)/PTO-1449 [ ] Copies of IDS Citations
11. [ ] Preliminary Amendment
12. [ ] Return Receipt Postcard (MPEP 503)
(Should be specifically itemized)
13. [+] * Small Entity Statement(s) *(PTO/SB/09-12)* [ ] Statement filed in prior application, Status still proper and desired
14. [ ] Certified Copy of Priority Document(s)
(if foreign priority is claimed)
15. [ ] Other: .....

16. **If a CONTINUING APPLICATION**, *check appropriate box, and supply the requisite information below and in a preliminary amendment:*
[ ] Continuation [ ] Divisional [ ] Continuation-in-part (CIP) of prior application No: _____/_____
Prior application information: Examiner _____ Group / Art Unit: _____
For CONTINUATION or DIVISIONAL APPS only: The entire disclosure of the prior application, from which an oath or declaration is supplied under Box 4b, is considered a part of the disclosure of the accompanying continuation or divisional application and is hereby incorporated by reference. The incorporation can only be relied upon when a portion has been inadvertently omitted from the submitted application parts.

17. CORRESPONDENCE ADDRESS

[ ] Customer Number or Bar Code Label (Insert Customer No. or Attach bar code label here) or [X] Correspondence address below

Name	CHRIS BRUNT / GARY FISHER				
Address	2240 FEDERAL AVE.				
City	LOS ANGELES	State	CA	Zip Code	90064
Country	USA	Telephone	310-477-8960	Fax	310-477-4910

Name (Print/Type)		Registration No. (Attorney/Agent)	
Signature		Date	

Burden Hour Statement: This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Box Patent Application, Washington, DC 20231.

PTO/SB/09 (12-97)
Approved for use through 9/30/00 OMB 0651-0031
Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE
Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

STATEMENT CLAIMING SMALL ENTITY STATUS (37 CFR 1.9(f) & 1.27(b))--INDEPENDENT INVENTOR	Docket Number (Optional)

Applicant, Patentee, or Identifier: CHRIS S. BRUNT & GARY R. FISHER

Application or Patent No.:

Filed or Issued: 8/30/2000

Title: FOUNTAIN CONTROL FOR GENERATING DYNAMICALLY CHANGING FLOW PATTERNS

As a below named inventor, I hereby state that I qualify as an independent inventor as defined in 37 CFR 1.9(c) for purposes of paying reduced fees to the Patent and Trademark Office described in:

- [x] the specification filed herewith with title as listed above.
- [ ] the application identified above.
- [ ] the patent identified above.

I have not assigned, granted, conveyed, or licensed, and am under no obligation under contract or law to assign, grant, convey, or license, any rights in the invention to any person who would not qualify as an independent inventor under 37 CFR 1.9(c) if that person had made the invention, or to any concern which would not qualify as a small business concern under 37 CFR 1.9(d) or a nonprofit organization under 37 CFR 1.9(e).

Each person, concern, or organization to which I have assigned, granted, conveyed, or licensed or am under an obligation under contract or law to assign, grant, convey, or license any rights in the invention is listed below:

- [x] No such person, concern, or organization exists.
- [ ] Each such person, concern, or organization is listed below.

Separate statements are required from each named person, concern, or organization having rights to the invention stating their status as small entities. (37 CFR 1.27)

I acknowledge the duty to file, in this application or patent, notification of any change in status resulting in loss of entitlement to small entity status prior to paying, or at the time of paying, the earliest of the issue fee or any maintenance fee due after the date on which status as a small entity is no longer appropriate. (37 CFR 1.28(b))

CHRIS S. BRUNT	GARY R. FISHER	
NAME OF INVENTOR	NAME OF INVENTOR	NAME OF INVENTOR
Chris S. Brunt	Gary R. Fisher	
Signature of inventor	Signature of inventor	Signature of inventor
8/30/2000.	8/30/2000	
Date	Date	Date

Burden Hour Statement: This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231 DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Washington, DC 20231.

FOUNTAIN CONTROL FOR GENERATING DYNAMICALLY CHANGING FLOW PATTERNS

BACKGROUND OF THE INVENTION

This invention relates to water fountains and an associated programmable controller for generating dynamically changing flow patterns.

Current indoor water fountains especially those intended for tabletop use generally have a preset flow rate and one or more outlets to channel water over the fountain elements. These fountains are non-dynamic and have a fixed flow pattern.

Virtually all indoor fountains employ a low power alternating current submersible pump. These pumps are generally comprised of a single-phase permanent-magnet synchronous motor (PMSM) with a multi-pole permanent-magnet rotor and a coupled impeller. Such pumps normally have no directional preference and are characterized by having notoriously low start-up torque. In order to overcome the low start-up torque problem and attain a pump with reliable starting characteristics, impellers have been designed with flexible blades and with mechanical slip-clutch arrangements to allow the rotor to begin rotation without having to overcome the water resistance of the impeller. These slip-clutch arrangements allow the impeller to rotate freely for a portion of one revolution before engaging a stop that prevents further rotation of the impeller relative to the rotor. Even with these modifications the majority of such pumps do not reliably start which is unfortunate in a fountain application. Pump and impeller apparatus with the above characteristics have been taught by Cabalcante (US4247265), Ellis, et al (US 5282961) and Willinger and Ivasauskas

(US4861468). These and functionally similar pumps are used extensively worldwide both in small fountain and aquarium applications.

A number of large-scale fountains with dynamic elements primarily designed for outside use has been reported. Owing to the method of water distribution and control, these are generally quite expensive to implement. Alba (US5069387) teaches a fountain with a multiplicity of nozzles with valves that are controlled by a microprocessor to vary flow rates. Chikazumi (US5288018) teaches a fountain with valves that are turned on and off by a controller to produce a variation of flows over a fountain wall. Dach (US5439170) teaches a fountain with a plurality of nozzles and valves that are turned off and on by a computer to produce various ornamental effects. Fuller and Robinson (US4892250) teach dynamic fountains with a number of computer controlled proportional valves feeding a number of nozzles. Przystawik (US4269352) teaches a dynamic fountain with a plurality of nozzles linked to pumps that are selectively turned on and off by electrical circuitry. None of these control the flow rate to the fountain elements by varying the flow rate of the individual pumps.

Various attempts to make fountains with changeable lighting have been reported. Evans (US305117) teaches a fountain illuminated by a color blending system that responds to variations in amplitude and frequency of a music signal. Chikazumi (US5288018) reports a fountain with rear disposed lighting modules whose intensity can be selectively varied. Dach (US5439170) teaches a plurality of lamps that can be varied in response to music. While controlling fountain lighting, none of these inventions effect a variation in individual nozzle output proportional to the amplitude or frequency of the input sounds.

BRIEF SUMMARY OF THE INVENTION

It is a primary objective of this invention to provide a programmable controller for varying the flow rate of the fountain in a predetermined manner by varying the flow rate of a pump so as to generate dynamically changing flow patterns.

It is a related object of this invention to provide a variation in the flow rate of water to a fountain element by simultaneously changing the frequency and pulse width of an alternating current (AC) input to an alternating current permanent-magnet synchronous motor pump in such a manner that the motor's power requirements are met over as wide a speed range as possible.

It is a related object of this invention to provide a programmable fountain pump control for generating a predetermined multiplicity of sequential flow volumes to a fountain so as to generate changeable water flow patterns over time.

It is a related object of this invention to provide a programmable pump control coupled with a rigidly connected rotor and impeller assembly that will repeatably and reliably start and will operate without impeller chatter.

It is a related object of this invention to provide a microprocessor driven control to vary the output of a low voltage AC PMSM in a predetermined manner.

It is a related object of this invention to provide a pump control that varies pump output in response to changes in the ambient sound level, to changes in an external audio signal and to changes in an external data input/output signal.

These and other objects of the invention are met by a programmable fountain controller for varying the flow rate of a fountain pump in a predetermined manner, wherein the mode of operation is selected from a group comprising a programmed mode, an audio input mode, a manual mode and an external data input/output mode.

BRIEF DESCRIPTION OF THE SEVERAL VIEWS OF THE DRAWING

FIG. 1 is a block diagram of a fountain with pump and controller.

FIG. 2 is a block diagram of the controller circuitry for controlling a low voltage AC PMSM pump.

FIG. 3 is a flow chart of the program for varying the flow rate of the pump in FIG. 2 according to mode switch settings.

FIG. 4 is an output state diagrams for outputs 1 and 2.

FIG. 5 is a side view of a first embodiment of a rotor and impeller assembly according to this invention.

FIG. 6 is a side view of a second embodiment of a rotor and impeller assembly according to this invention.

DETAILED DESCRIPTION OF THE INVENTION

Figure 1 shows a block diagram of a fountain with pump and controller. The dotted lines in FIG. 1 designate electrical connections. The fountain comprises fountain display element 100, pump 130, controller 150, and optional light 140.

Pump 130 is comprised of an alternating current permanent-magnet synchronous motor (PMSM) with a magnetic rotor having a rigidly coupled

impeller. Preferably pump 130 is designed to be powered by 12 VAC and is submersible.

Pump 130 has water inlet 135 and outlet conduit 120. Outlet conduit 120 couples to fountain display inlet coupling 110 of fountain display element 100. For descriptive purposes fountain display element 100 can be considered to be a nozzle although a multiplicity of outlets of varying configuration can alternatively be specified. Although not shown in FIG. 1 it is assumed water is continually available at inlet 135 of pump 130 and exits fountain display unit at 115 (for the case of a single nozzle).

Controller 150 is powered by power source 205, which is preferably 12VAC. The output of 150 is a series of voltage pulses of width and frequency predetermined to yield a desired no load flow rate at the outlet conduit of pump 130. To accomplish this controller 150 converts alternating current from 205 to direct current which is then converted to a pulse width and frequency modulated output suitable for driving the pump mechanism. This is implemented by a micro-controller-driven power output switching circuit.

The series of pulses defining the pulsed waveform to the pump can be stationary or can be time-varying to reflect variations of input signals from various sources (such as a microphone) and/or to reflect pre-programmed variations set by an internal stored program. Advantageously, this pulse train also provides power to optional light 140 which varies in brightness according to changes in the instantaneous no load flow rate of the pump.

Controller 150 has several modes of operation that are user-selectable. These modes of operation are addressable by a multi-position mode switch. The primary modes of operation comprise 1) a programmed flow-variation mode, 2) a manual flow-setting mode, 3) an audio input mode and 4) an external data I/O mode.

In the programmed flow-variation mode the controller executes a pre-programmed sequence of commands to cause pump flow rate to vary in a pre-determined manner. In doing so, the controller generates a complex sequence of flows by combining and repeating several elementary operations in a pre-determined fashion. These operations include (but are not limited to) 1) ramping from one set flow rate to another, 2) setting the ramp change rate for a given ramp operation and 3) setting the time delay between successive operations. These operations allow for a wide variation in pump behavior (i.e. gentle to rapid ramping between two flow rates, short to long constant flows and flow "spikes"). Several programmed flow-control regimes can be accommodated by additional positions on the user-selectable mode switch.

In the manual flow setting mode the user sets the desired (constant) flow rate by adjusting a potentiometer.

In the audio input mode a microphone or external audio input is used to cause the pump to proportionally vary in flow rate in response to a sound signal.

In the external data I/O mode a digitally derived control signal is used to control pump output.

A block diagram of controller 150 is shown in FIG. 2. Controller 150 is comprised of rectifier circuitry 210, voltage regulator 220, micro-controller 200, A/D converter 230, mode switch 235, output power switching circuitry 240, microphone 245, audio amplifier 250, audio gain potentiometer 255, multi-purpose potentiometer 270, external audio input 265, line receiver/transmitter 260 and external data input/output port 280.

Micro-controller 200 is preferably a programmable micro-controller such as the PIC 16C5x although other families of micro-controllers of greater complexity may alternatively be specified depending on the complexity of the programmed modes and whether multiple pumps are to be synchronously controlled by the same micro-controller.

Micro-controller 200 performs several operations:

First, it stores program information for the calculation and formation of the required output (pump drive) switching signals.

Second, it stores a sequence of instructions necessary to produce a predetermined multiplicity of pump actions.

Third, it arithmetically calculates the pulse width and frequency timing for the output signals necessary to drive power-switching circuit 240 and thereby pump 130. This calculation derives from information provided by either 1) the stored program, and/or 2) analog to digital conversion of signals from microphone 245, external audio input 265, external data I/O signal port 280 or potentiometer 270.

Fourth, it reads mode switch 235 to thereby determine the required program flow mode.

Fifth, in 230 it performs analog to digital conversion of the signal produced by 1) the audio circuitry (detector circuitry 260 fed by either microphone 245 and microphone amplifier 250, and/or external audio input 265 and/or by potentiometer 270.

Sixth, when mode switch 235 is in external data I/O mode, micro-controller 200 decodes an externally derived digital control signal at 280 (e.g. DMX 512 format) via line receiver/transmitter 275 and uses such information to determine the instantaneous desired pump flow rate. Alternatively, it may transmit control data for synchronization with, or control over, other similar pump control units.

Output power switching circuit 240 preferably comprises a number of solid state power transistors (e.g. FET's, IGBT's, bipolar devices or hybrids thereof) arranged in a bridge, half bridge or push-pull configuration. These devices are driven by output from the micro-controller to produce a switched AC waveform of variable pulse width and frequency suitable for driving the pump 130. Power for

the switched waveform is supplied to the switch circuit by rectifier circuitry 210, which is fed by low voltage AC from wall transformer unit 205.

Audio amplifier 250 amplifies the audio signal produced by microphone 245. A User-adjustable potentiometer 255 is provided to adjust the gain of the amplifier to allow setting the sensitivity of the controller to various levels of ambient sound. This signal is rectified (detected) by detector 260 to produce a varying DC signal proportional to the input audio level. Detector 260 then provides a time-varying DC level signal to A/ D converter 230. Converter 230 then converts this signal to digital form for use by the micro-controller's internal program to affect the calculation of the output pulse waveform.

Detector 260 is preferably comprised of rectifier and capacitor/resistor filter circuitry. As shown in FIG. 2, external audio device 265 such as a music-reproducing device, radio receiver or television can also be fed into amplifier 250 to provide additional (or separate) audio inputs to the micro-controller.

Mode switch 235 is a multi-position switch which is read directly by micro-controller 200 as shown in FIG. 2. As described above, the information thereby supplied is used to determine the internal program flow of the micro-controller and thereby to affect the mode of operation of the circuitry.

Potentiometer 270 is provided for adjustment of various operational parameters by the end user. This device is used to produce a DC level which is "read" by analog to digital circuitry 230. The function of potentiometer 270 is determined by the program mode, which is in turn selectable, by mode switch 235. Typical functions of potentiometer 270 include but are not limited to: 1) manual variation of pump flow rate; 2) adjustment of the audio or external audio signal threshold; 3) selection of a sub-program for a given mode switch selection (pot position used as a "fuzzy" switch); 4) variation of the duration of each selection in a sequence of programmed selections (i.e. a scale factor in the programmed flow-variation mode); and 5) combinations of the above.

FIG. 3 shows a flow chart of a program for the micro-controller shown in FIG. 2. The program essentially comprises a repeated loop (305) which switches the output waveforms from one state to the next (390) to generate the output pulsed waveform which powers pump 130. The timing of this output state switching is the essential purpose of loop 305 and its associated sub-routine timings.

FIG.4 shows a graphical output state diagram for one pulse cycle for the case of differential drive. As shown, there are two outputs, Output 1 (400) (labeled "A") and Output 2 (410) (labeled "B") wherein Output 2 is the inverse of Output 1. States 1 and 3 (440, 444) are the "dead time" states with duration equal to t_1 (420). In state 1 and state 3 the output pulses are set such that zero volts appears across the pump motor. States 2 and 4 (442, 446) are the "pulse states" having duration equal to t_2 (430). In state 2 and state 4 the voltage appearing across the motor is approximately equal to $+v_{sup}$ and $-v_{sup}$, respectively. Thus the three voltage levels appearing across the pump motor are $+v_{sup}$, $-v_{sup}$ and zero. These are switched for Output 1 and Output 2 in program block 390) of FIG. 3.

Alternatively for some applications a single output, Output 1, may be switched in a similar manner. In such a case the required DC supply voltage (v_{sup}) would be approximately double that of the differential output version depicted in FIG. 4.

The required output state timing (block 370 in FIG. 3) is calculated such that the repetition rate frequency $\{ f = 1/(2x(t_1 + t_2)) \}$ of the output pulse waveform and the pulse width t_2 (430) of the voltage waveform feeding pump 130 is optimally determined for a given desired pump flow rate. Programmatically, this information is derived 1) arithmetically or 2) from "look up" tables incorporated into the internal micro-controller program or from both and is determined in such a manner as to provide a waveform with characteristics most suitable for pump

drive within acceptable pre-determined maximum and minimum flow rates that avoid stalling. To this effect, determination of the required flow rate may be a function of any combination of audio or external signal level, potentiometer settings, switch setting and instruction sequence reads.

The program in FIG. 3 shall now be described.

Initialize and Set Defaults block 306 initializes the micro-controller and sets initial default settings for generating a start-up pump flow rate. Timers Reset block 310 resets the timers to zero. Output Pulse Reset block 320 resets Output 1 and Output 2 to zero (states 1 and 3 in FIG. 4).

Read Mode Switch block 330 then reads mode switch 235 to determine program mode; this may set other parametric values depending on the switch setting. A sequence of decision blocks are then executed for each of the switch modes described previously. These are Audio Input Mode decision block 340, Manual Flow Setting Mode decision block 350, External Data I/O Mode decision block 355 and Programmed Flow-Variation Mode decision block 360. Depending on whether the result of each of these blocks is "yes" or "no", various program functions (345, 352, 358, 365) are performed as shown in FIG.3. Note that the flow chart allows the potential for a given mode to influence modes further down in the sequential chain.

Next, Calculate Pulse Width & Frequency block 370 calculates the desired frequency and pulse width values for t_1 and t_2 for the next cycle based on the results of the above decision blocks and subsequent operations. Test Timers block 380 then initiates a programmed wait t_1 until the time for the next state change for Outputs 1 and 2. When this expires, the Switch Pulse States block 390 switches Outputs 1 and 2 to their next respective states. Test Timers block 395 then initiates a second programmed wait t_2. After this wait expires, the program returns to Timers Reset block 310 to close the loop (305).

The impeller and rotor of pump 130 for use in conjunction with controller 150 in FIG. 1 shall now be discussed. In order for pump 130 to operate without noise and chatter when driven by controller 150, rigid coupling of the rotor and impeller is required. This is a consequence of the pulsed nature of the input to the pump supplied by switching circuit 240 in FIG. 2. If commonly used slip-clutch arrangements were alternatively specified, which would allow the impeller to rotate freely for a portion of one revolution before engaging, chatter and noise would ensue; this would be exacerbated under conditions of variable pump back-pressure.

Aside from eliminating chatter and impeller noise, an allied benefit of the rigid rotor/impeller assembly when used in a PMSM pump coupled with controller 150 is that starting problems that are a major concern with PMSM pumps of the type used in aquariums and small fountains are completely eliminated.

It should be noted specifying a rigid coupling of the impeller and rotor is in direct opposition to the slip-type couplings commonly used with PMSM pumps to reduce starting problems when such pumps are operated with AC power from the mains or from step-down transformers. In fact, simple PMSM submersible pumps for aquarium and/or fountain use would not start when powered by conventional AC line sources if they employed the fixed rotor and impeller assembly of this invention.

FIG. 5 shows a side view of a first embodiment of a rotor and impeller assembly for PMSM pump 130 according to this invention. The assembly is comprised of rotor 510, rotor shaft 504, coupling 503, impeller shaft 502 and impeller 500 with plurality of evenly spaced impeller blades 505. Impeller 500, shafts 502 and 504, coupling 503 and magnetic rotor 510 are concentric with one another. Impeller shaft 502 is press-fit into impeller 500 allowing no relative motion. Similarly, rotor shaft 504 is press-fit into rotor 510 allowing no relative motion. Coupling 503 rigidly couples shafts 502 and 504 without allowing their

relative rotation. Cylindrical opening 520 in rotor body 510 is provided to freely receive a fixed shaft in pump 130 (not shown) for constraining side-to-side motion and wobble of the impeller assembly when it rotates in the pump motor's magnetic field.

FIG. 6 shows a side elevation view of a second embodiment of a rigid rotor/impeller assembly for use with controller 150. In this embodiment shaft 620 is press-fit into rotor 610 and impeller 600 so as to preclude relative rotation of 600 and 630. As in the first embodiment of FIG. 5, a cylindrical opening 630 in rotor body 610 is provided to freely receive a fixed shaft in pump 130 (not shown) for constraining side-to-side motion and wobble of the impeller assembly when it rotates in the pump motor's magnetic field.

Various modifications of the disclosed invention can be considered without deviating from its scope. As one modification, a multiplicity of pumps can be controlled by a single micro-controller 200. This would allow synchronization of multiple pumps either by programmed mode or by combinations of audio input, external data I/O (i.e. DMX 512 format) and programmed mode. In this instance a microprocessor with the appropriate number of I/O ports and sufficient programmed memory would be chosen based on program requirements and the number of pumps to synchronize.

As another modification, a multiplicity of pumps could be controlled by multiple similar micro-controller circuits such as described above with each device communicating or synchronizing operation through a digital communication mechanism.

As another modification, other switches may also be provided either as replacement for or in addition to potentiometer 270 to allow the micro-controller to determine other operational parameters based on user input.

As another modification, a unit similar in operational principle to that described except working directly off of line voltage (no wall transformer) and

driving a high voltage (e.g. 110 volts AC) pump can be realized. The potential drawback of this modification would be the potentially lethal voltages generated by the circuitry.

As another modification, while four impeller blades are shown in FIG. 5 and FIG. 6, alternative numbers of blades may alternatively be specified to optimize the operating characteristics of a particular pump.

Although there has been shown and described hereinabove a specific arrangement of a fountain and control for generating dynamically changing flow patterns in accordance with the invention for the purpose or illustrating the manner in which the invention may be used to advantage, it will be appreciated that the invention is not limited thereto. Accordingly, any and all modifications, variations, or equivalent arrangements that may occur to those skilled in the art should be considered to be within the scope of the invention as defined in the annexed claims.

What is claimed is:

1. A controller for varying the flow rate of a pump in a predetermined manner, comprising:

a. a programmable micro-controller for calculating the pulse width and frequency timing for generating pulse switching signals to control said pump; and

b. an output switching circuit for generating a pulsed waveform for driving said pump according to said pulse switching signals.

2. The pump of Claim 1 further comprising an AC permanent-magnet synchronous motor and a rotor and impeller assembly coupled to said motor.

3. The rotor and impeller assembly of Claim 2, wherein said rotor and said impeller are concentric and wherein said assembly has means defining a rigid coupling between said rotor and said impeller for preventing relative rotation.

4. The controller of Claim 1, further comprising a mode switch for choosing the mode of operation of said micro-controller, wherein the mode of operation is selected from a group comprised of a programmed flow control variation mode, an audio input mode, a manual mode and an external data input/output mode.

5. The output switching circuit of Claim 1, further comprising a multiplicity of solid state power transistors arranged in a configuration selected from a bridge configuration, a half bridge configuration and a push-pull configuration.

6. The output switching circuit of Claim 5, wherein said power transistors are selected from a group consisting of FET's, IGBT's, bipolar devices or hybrids.

7. The controller of Claim 1 further comprising:

a. audio circuitry for causing the flow rate of said pump to vary proportionately to a signal from a microphone or an external audio input, wherein said circuitry further comprises an amplifier with a first potentiometer for varying said amplifier's gain and a detector circuit for providing a varying DC level to an analog to digital converter for input into said micro-controller; and

b. a second potentiometer coupled to said analog to digital converter for adjustment of operational parameters dependent on the switch position of said mode switch.

8. The controller of Claim 1, further comprising a line receiver/transmitter for interfacing an external data input/output signal to said micro-controller.

9. The controller of Claim 1, further comprising rectifier circuitry for converting alternating current to direct current for driving said micro-controller, said analog to digital converter, said audio circuitry and said switching circuitry.

10. The micro-controller of Claim 1, further comprising an embedded software program for controlling the behavior of said pump over time dependent upon the settings of said mode switch, said first potentiometer and said second potentiometer.

11. A controller for varying the flow rate of an AC permanent-magnet synchronous motor pump comprising:

a. a mode switch for selecting the mode of operation of the controller from a group comprised of a programmed flow control variation mode, an audio input mode, a manual mode and an external data input/output mode;

b. a programmable micro-controller for calculating the pulse width and frequency timing for generating pulse switching signals to control said pump; and

c. an output switching circuit for generating a pulsed waveform for driving said pump according to said pulse switching signals.

12. A fountain for generating variable water patterns comprising:

a. at least one fountain element comprised of a water inlet and one or more water outlets for the flow of water;

b. an AC permanent-magnet synchronous motor pump having a rigidly coupled rotor and impeller, the output of said pump connected to the inlet of said fountain element;

c. a programmable micro-controller for calculating the pulse width and frequency timing for generating pulse switching signals to control said pump in a predetermined manner; and

d. an output switching circuit for generating a pulsed waveform for driving said pump according to said pulse switching signals.

FOUNTAIN CONTROL FOR GENERATING DYNAMICALLY CHANGING FLOW PATTERNS

ABSTRACT

A programmable fountain controller for varying the flow rate of an AC PMSM fountain pump in a pre-determined manner so as to generate dynamically changing flow patterns. A micro-controller is provided to vary the pulse width and frequency timing over time for generating signals to an output switching circuit that drives the pump. A mode switch provides user-settable modes of operation selected from a group comprising a programmed flow control mode, a manual flow setting mode, an audio input mode and an external data input/output mode.

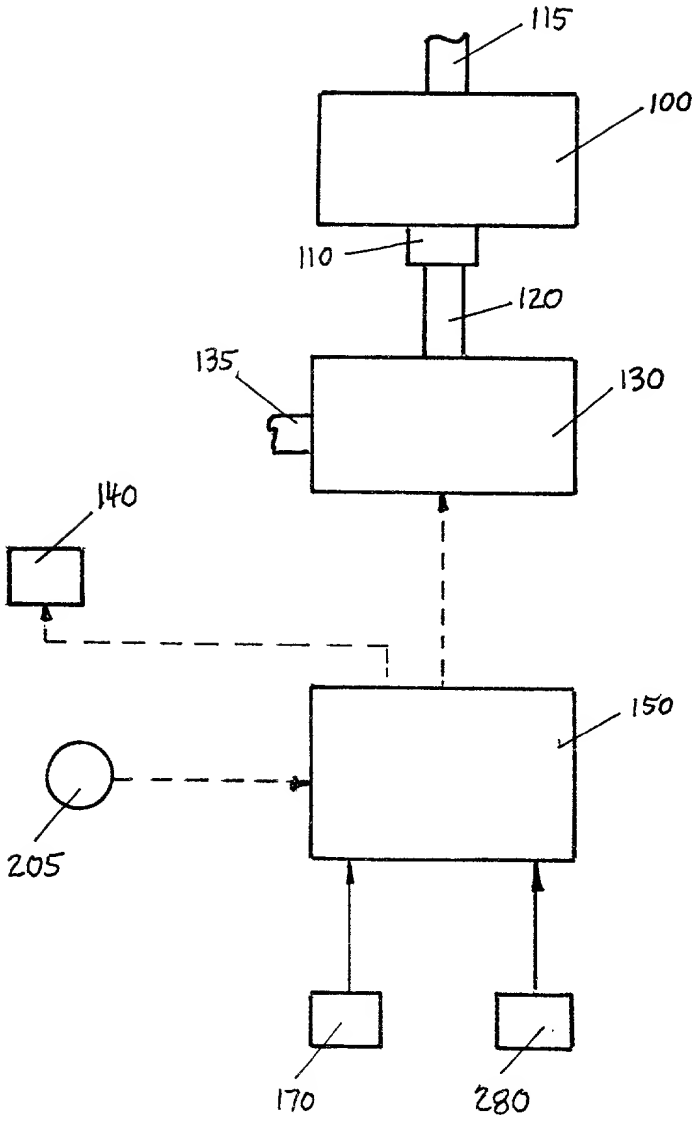

FIG. 1

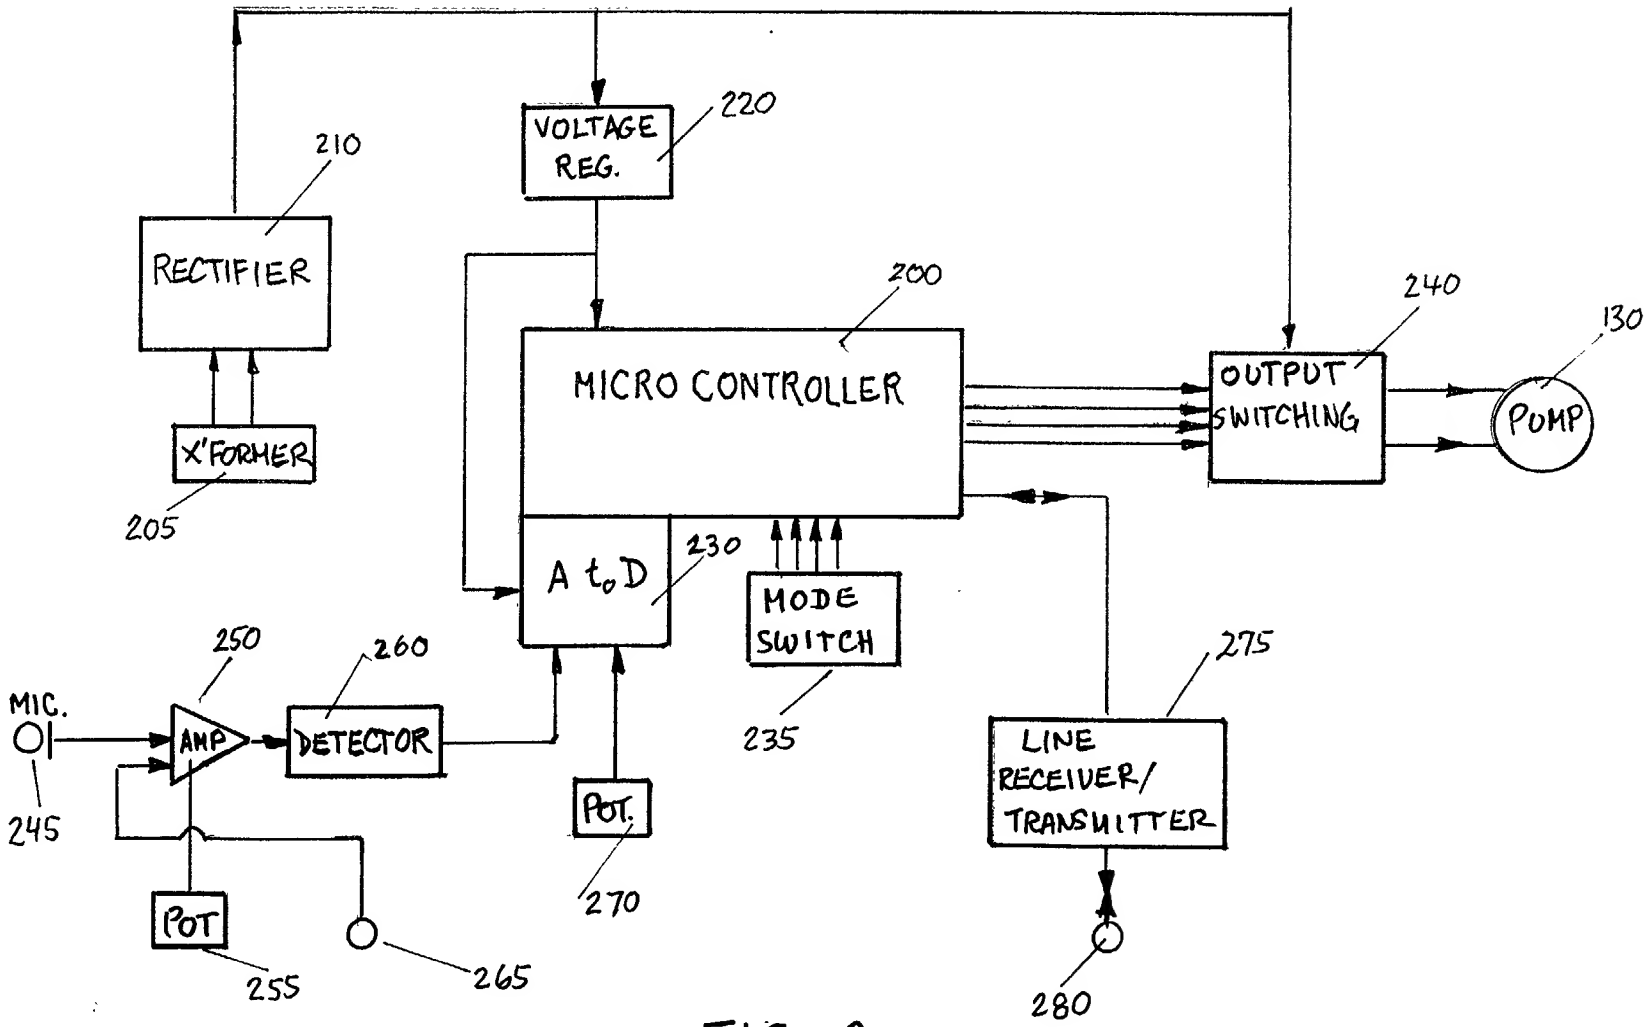
VOLTAGE REG.
220
210
RECTIFIER
200
MICRO CONTROLLER
240
OUTPUT SWITCHING
130
PUMP
X'FORMER
205
A to D
230
MODE SWITCH
235
250
260
MIC.
AMP
DETECTOR
245
POT.
270
275
LINE RECEIVER/ TRANSMITTER
POT
255
265
280

FIG. 2

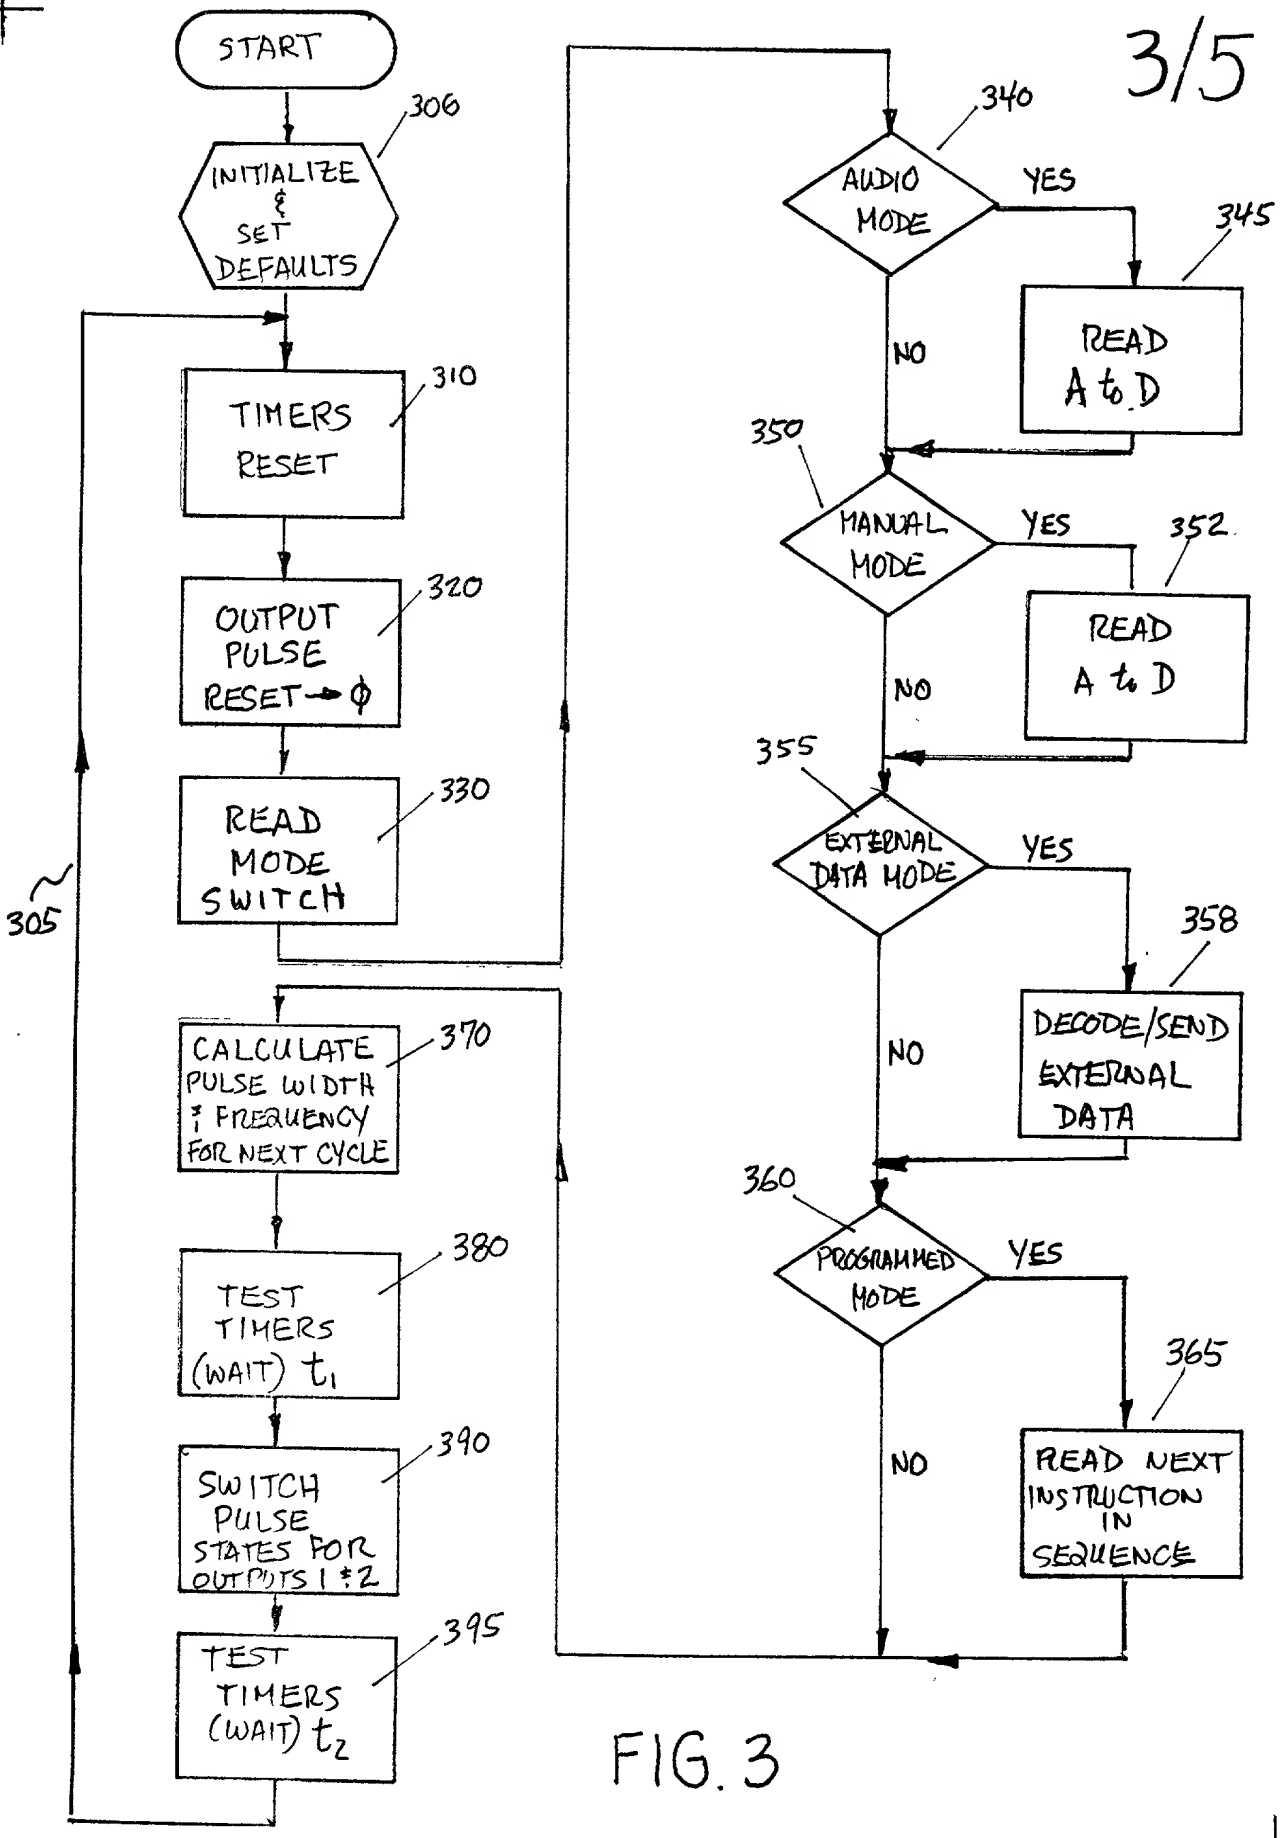
START
306
INITIALIZE & SET DEFAULTS
310
TIMERS RESET
320
OUTPUT PULSE RESET → ϕ
330
READ MODE SWITCH
305
370
CALCULATE PULSE WIDTH & FREQUENCY FOR NEXT CYCLE
380
TEST TIMERS (WAIT) t_1
390
SWITCH PULSE STATES FOR OUTPUTS 1 & 2
395
TEST TIMERS (WAIT) t_2
340
AUDIO MODE
YES
345
READ A to D
NO
350
MANUAL MODE
YES
352
READ A to D
NO
355
EXTERNAL DATA MODE
YES
358
DECODE/SEND EXTERNAL DATA
NO
360
PROGRAMMED MODE
YES
365
READ NEXT INSTRUCTION IN SEQUENCE
NO

FIG. 3

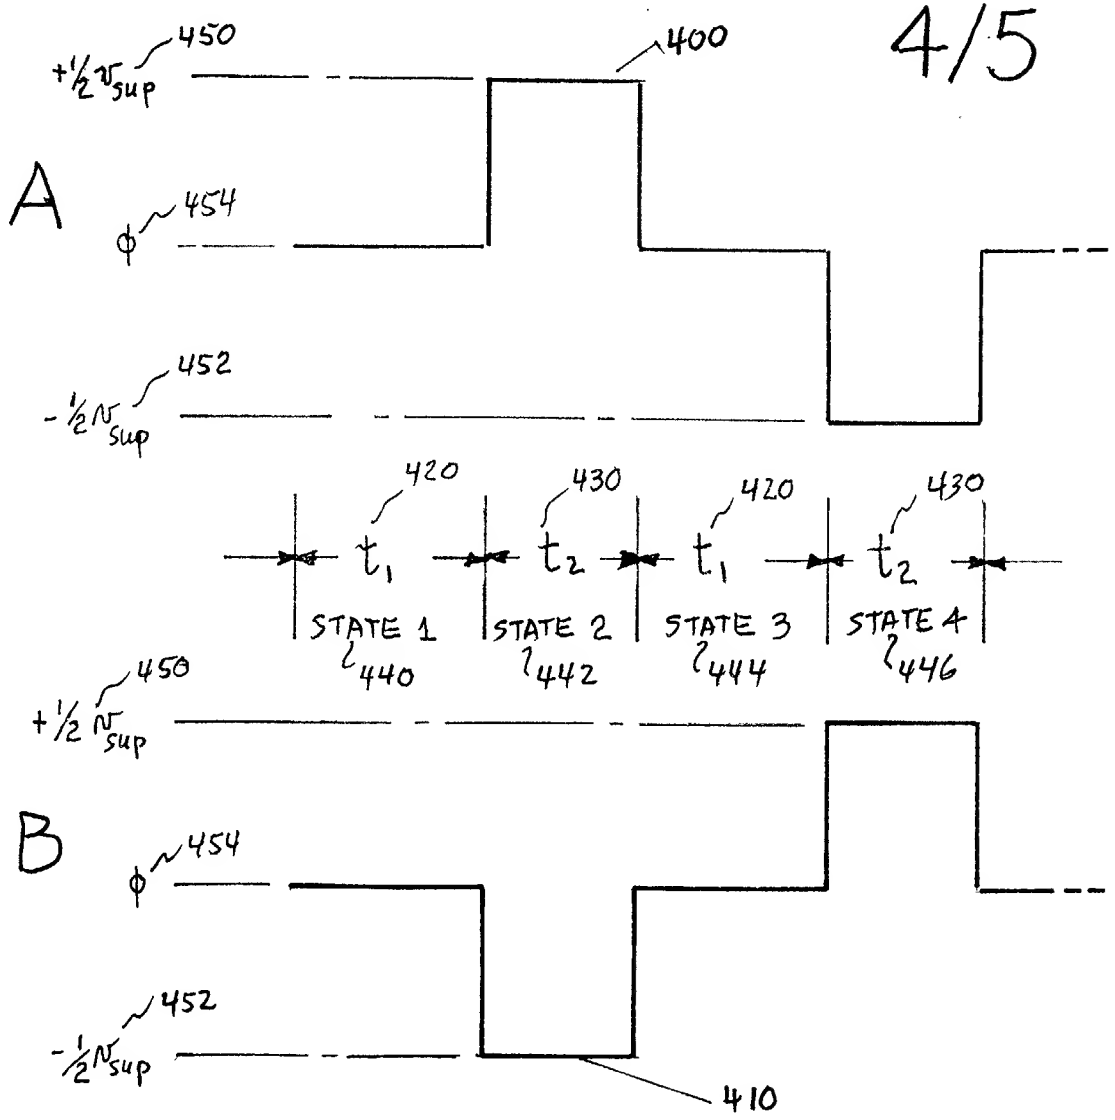
450
+½ N sup
400
A
454
φ
452
-½ N sup
420
430
420
430
t1
t2
t1
t2
STATE 1
STATE 2
STATE 3
STATE 4
440
442
444
446
450
+½ N sup
B
454
φ
452
-½ N sup
410

FIG. 4

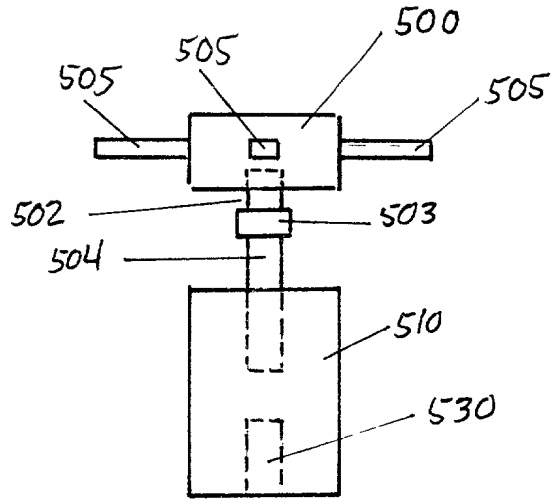

FIG. 5

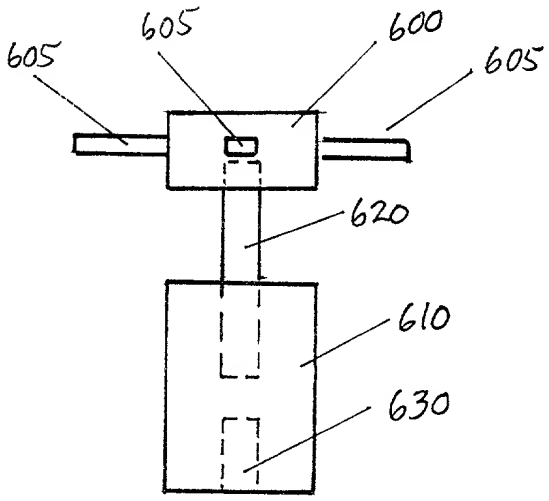

FIG. 6

Please type a plus sign (+) inside this box → ☐

PTO/SB/01 (12-97)
Approved for use through 9/30/00. OMB 0651-0032
Patent and Trademark Office: U.S. DEPARTMENT OF COMMERCE
Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

DECLARATION FOR UTILITY OR DESIGN PATENT APPLICATION (37 CFR 1.63)

☐ Declaration Submitted with Initial Filing **OR** ☐ Declaration Submitted after Initial Filing (surcharge (37 CFR 1.16 (e)) required)

Attorney Docket Number	
First Named Inventor	CHRIS S. BRUNT
COMPLETE IF KNOWN	
Application Number	/
Filing Date	8/30/2000
Group Art Unit	
Examiner Name	

As a below named inventor, I hereby declare that:

My residence, post office address, and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

FOUNTAIN CONTROL FOR GENERATING DYNAMICALLY CHANGING FLOW PATTERNS

(Title of the Invention)

the specification of which
☒ is attached hereto
OR
☐ was filed on (MM/DD/YYYY) ☐ as United States Application Number or PCT International Application Number ☐ and was amended on (MM/DD/YYYY) ☐ (if applicable).

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment specifically referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR 1.56.

I hereby claim foreign priority benefits under 35 U.S.C. 119(a)-(d) or 365(b) of any foreign application(s) for patent or inventor's certificate, or 365(a) of any PCT international application which designated at least one country other than the United States of America, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or of any PCT international application having a filing date before that of the application on which priority is claimed.

Prior Foreign Application Number(s)	Country	Foreign Filing Date (MM/DD/YYYY)	Priority Not Claimed	Certified Copy Attached? YES	NO
			☐	☐	☐
			☐	☐	☐
			☐	☐	☐
			☐	☐	☐

☐ Additional foreign application numbers are listed on a supplemental priority data sheet PTO/SB/02B attached hereto:

I hereby claim the benefit under 35 U.S.C. 119(e) of any United States provisional application(s) listed below.

Application Number(s)	Filing Date (MM/DD/YYYY)	
		☐ Additional provisional application numbers are listed on a supplemental priority data sheet PTO/SB/02B attached hereto.

Please type a plus sign (+) inside this box → ✚

PTO/SB/01 (12-97)
Approved for use through 9/30/00. OMB 0651-0032
Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

DECLARATION — Utility or Design Patent Application

I hereby claim the benefit under 35 U.S.C. 120 of any United States application(s), or 365(c) of any PCT international application designating the United States of America, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of 35 U.S.C. 112, I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR 1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application.

U.S. Parent Application or PCT Parent Number	Parent Filing Date (MM/DD/YYYY)	Parent Patent Number (if applicable)

☐ Additional U.S. or PCT international application numbers are listed on a supplemental priority data sheet PTO/SB/02B attached hereto.

As a named inventor, I hereby appoint the following registered practitioner(s) to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith: ☐ Customer Number [ ] → *Place Customer Number Bar Code Label here*
OR
☐ Registered practitioner(s) name/registration number listed below

Name	Registration Number	Name	Registration Number

☐ Additional registered practitioner(s) named on supplemental Registered Practitioner Information sheet PTO/SB/02C attached hereto.

Direct all correspondence to: ☐ Customer Number or Bar Code Label [ ] *OR* ☒ Correspondence address below

Name	CHRIS BRUNT/GARY FISHER						
Address	2240 FEDERAL AVE.						
Address							
City	LOS ANGELES			**State**	CA	**ZIP**	90064
Country	USA	**Telephone**	310·477·8960			**Fax**	310-477-4910

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under 18 U.S.C. 1001 and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Name of Sole or First Inventor: ☐ A petition has been filed for this unsigned inventor

Given Name (first and middle [if any])	Family Name or Surname
CHRIS S.	BRUNT

Inventor's Signature						**Date**	8/30/00
Residence: City	TOPANGA	**State**	CA	**Country**	USA	**Citizenship**	U.K.
Post Office Address	P.O. BOX 325						
Post Office Address							
City	TOPANGA	**State**	CA	**ZIP**	90290	**Country**	USA

☒ Additional inventors are being named on the 1 supplemental Additional Inventor(s) sheet(s) PTO/SB/02A attached hereto

Please type a plus sign (+) inside this box → [+]

PTO/SB/02A (3-97)
Approved for use through 9/30/98. OMB 0651-0032
Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

DECLARATION

ADDITIONAL INVENTOR(S)
Supplemental Sheet
Page ___ of ___

Name of Additional Joint Inventor, if any:	☐ A petition has been filed for this unsigned inventor						
Given Name (first and middle [if any])			Family Name or Surname				
GARY R.			FISHER				
Inventor's Signature	Gary R. Fisher					**Date**	8/30/00
Residence: City	LOS ANGELES	**State** CA		**Country** USA		**Citizenship**	USA
Post Office Address	P.O. BOX 25959						
Post Office Address							
City	LOS ANGELES	**State** CA	**ZIP** 90025		**Country** USA		

Name of Additional Joint Inventor, if any:	☐ A petition has been filed for this unsigned inventor						
Given Name (first and middle [if any])			Family Name or Surname				
Inventor's Signature						**Date**	
Residence: City		**State**		**Country**		**Citizenship**	
Post Office Address							
Post Office Address							
City		**State**	**ZIP**		**Country**		

Name of Additional Joint Inventor, if any:	☐ A petition has been filed for this unsigned inventor						
Given Name (first and middle [if any])			Family Name or Surname				
Inventor's Signature						**Date**	
Residence: City		**State**		**Country**		**Citizenship**	
Post Office Address							
Post Office Address							
City		**State**	**ZIP**		**Country**		

Burden Hour Statement: This form is estimated to take 0.4 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Washington, DC 20231.